



SPECIFICATION SHEET




Product : Cupstock Base

SUBSTANCE (GSM)	CALIPER (μM)	BENDING RESISTANCE(L&W) mN	
		MD	CD
180	220	60	20
190	230	65	25
200	240	75	30
230	270	100	40
TOL : ± 5%	±10%	±10%	

PARAMETER	UNITS	VALUE
PLY BOND	MFT-LB	80(AVG.MIN)
ROUGHNESS (Bendtsen) MG SIDE NON -MG SIDE	ML/MIN	400(AVG.MAX) 1700(AVG.MAX)
BRIGHTNESS TOP BACK	%	80(MIN)
STRETCH CD FOR 180 GSM 190 -230 GSM	%	4.5(MIN) 4.0(MIN)
COBB I MIN TOP BOTTOM	GSM	30 MAX 30 MAX
EDGEWICK (L.A)	KG/M ² /HR	1.5(NOMINAL) 2.6(MAX)
MOISTURE 180 GSM 190 -230 GSM	%	6.5(MAX) 7.5(MAX)

CONSTRUCTION

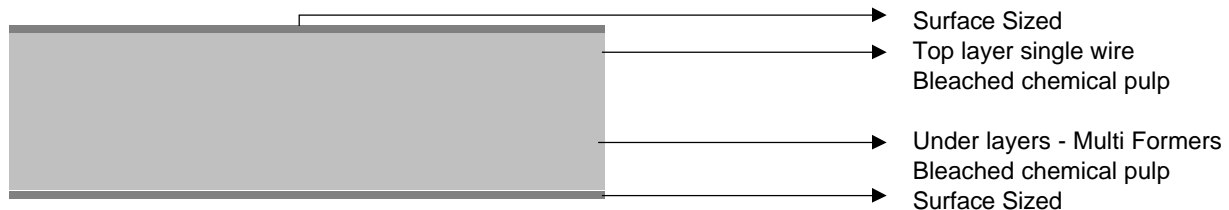

Note :

1. Tolerances are based upon 95% confidence limit on single mill measurements of random samples.
2. Specifications are subject to changes without any prior notice